




**SYCOR**  
TECHNOLOGY INC.

Braid

## Nickel Plated Tubular Braid

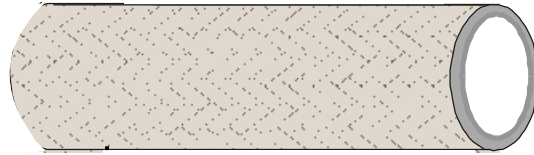

Sycor Part Number	Nominal Inside Diameter	Wire Size AWG	Number Of Wires	Constructi	Braid Size AWG	Circular MIL Area	Approx. Weight Lbs./Mft.
A0C24236NT	1/16"	36	48	24-2-36	19	1,200	4
A0C24436NT	7/64"	36	96	24-4-36	16	2,400	8.2
A0C24536NT	1/8"	36	120	24-5-36	15	3,000	10.3
A0C24836NT	3/16"	36	192	24-8-36	13	4,800	16.3
A0C24834NT	1/4"	34	192	24-8-34	11	7,632	27.9
A0C48636NT	5/16"	36	288	48-6-36	12	7,200	24.2
A0C48836NT	3/8"	36	384	48-8-36	10	9,600	34.5
A0C48634NT	7/16"	34	288	48-6-34	10	11,434	39.3
A0C481136NT	1/2"	36	528	48-11-36	9	13,200	47.7
A0C481536NT	5/8"	36	720	48-15-36	8	18,000	59.4
A0C481836NT	3/4"	36	864	48-18-36	7	21,600	73.5
A0C481032NT	7/8"	32	480	48-10-32	5	30,720	100
A0C48830NT	1"	30	384	48-8-30	4	38,400	135
A0C481130NT	1-3/8"	30	528	48-11-30	3	52,800	180
A0C481230NT	1-1/2"	30	576	48-12-30	3	57,600	195
A0C481430NT	1-7/8"	30	672	48-14-30	2	67,200	225
A0C481630NT	2-1/4"	30	768	48-16-30	1	76,800	255

**DESCRIPTION:**

Individual wires have 50 microinches Nickel plating over copper.

**APPLICATION:**

Recommended for high temperature applications up to 400°C or if special corrosion resistance is required.

**VALUE ADDED SERVICES**

Cut Pieces, Ground Straps,  
Terminating

Sycor Advance Wire and Cable