




SYCOR

TECHNOLOGY INC.

Braid

Silver Plated Copper Tubular Braid

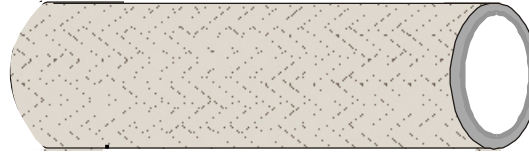

Sycor Part Number	QQ-B-575 Part Number	Nominal Inside Diamete	Wire Size AWG	Number Of Wires	Braid Size AWG	Circular MIL Area	Approx. Weight Lbs./Mft.
A0C48534ST	QQB575R34S375	.375"	34	240	10	9,540	32.7
A0C48332ST	QQB575R32S375	.375"	32	144	11	9,102	32.4
A0C24730ST	QQB575R30S375	.375"	30	168	8	16,800	57
A0C241030ST	QQB575R30S437	.437"	30	240	6	24,000	80.6
A0C481136ST	QQB575R36S500	.500"	36	528	9	13,200	47.7
A0C48734ST	QQB575R34S500	.500"	34	336	9	13,356	47.7
A0C48432ST	QQB575R32S500	.500"	32	192	9	12,136	40
A0C241530ST	QQB575R30S500	.500"	30	360	5	36,000	117
A0C481030ST	QQB575R30S562	.562"	30	480	3	48,000	151
A0C481630ST	QQB575R30S656	.656"	30	768	1	76,800	255
A0C481836ST	QQB575R36S781	.781"	36	864	7	21,600	73.5
A0C184134ST	QQB575R34S781	.781"	34	528	7	20,956	72.5
A0C48732ST	QQB575R32S781	.781"	32	336	7	21,239	72.7
A0C48730ST	QQB575R30S875	.875"	30	336	5	33,600	118
A0C48830ST	QQB575R30S1000	1.000"	30	384	4	38,400	135
A0C48930ST	QQB575R30S1125	1.125"	30	432	4	43,200	150
A0C481030ST*		.1250"	30	480	3	48,000	165
A0C481130ST	QQB575R30S1375	1.375"	30	528	3	52,800	180
A0C481230ST	QQB575R30S1500	1.500"	30	576	3	57,600	195
A0C481430ST	QQB575R30S2000	2.000"	30	672	2	67,200	225
A0C481630ST*		2.250"	30	768	1	76,800	255

DESCRIPTION:

Federal Specification QQ-B-575. Minimum plating thickness - 40 microinches.

APPLICATION:

Silver plating rather than tin plating is necessary when the shielding is to be subjected to temperatures exceeding 200°C or if special corrosion resistance is required.

VALUE ADDED SERVICES

Cut Pieces , Ground Straps ,
Terminating

*Manufactured to QQ-B-575 standards although these extra large sizes are not listed in the specifications. Selected items are also offered in flat form in accordance with QQ-B-575.

Sycor Technology Inc. Advance Wire and Cable Division

2455 Milltower Court, Mississauga, Ontario L5N 5Z6 Phone: (905) 821-3591, Fax: (905) 821-7260

Sycor Advance Wire & Cable