




SYCOR
TECHNOLOGY INC.

Braid

Silver Plated Copper Tubular Braid

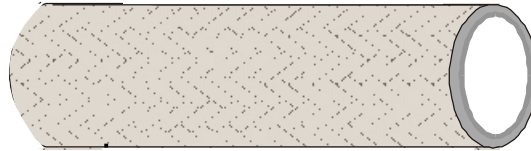

Sycor Part Number	QQ-B-575 Part Number	Nominal Inside Diameter	Wire Size AWG	Number Of Wires	Braid Size AWG	Circular MIL Area	Approx. Weight Lbs./Mft.
AOC24136ST	QQB575R36S031	.031"	36	24	22	600	2
AOC24236ST	QQB575R36S062	.062"	36	48	19	1,200	4
AOC16234ST	QQB575R34S062	.062"	34	32	19	1,351	4.3
AOC16132ST	QQB575R32S062	.062"	32	16	20	1,011	3.3
AOC24336ST	QQB575R36S078	.078"	36	72	18	1,800	6
AOC24436ST	QQB575R36S109	.109"	36	96	16	2,400	8.2
AOC16434ST	QQB575R34S109	.109"	34	64	16	2,544	8.8
AOC16232ST	QQB575R32S109	.109"	32	32	17	2,023	6.6
AOC24536ST	QQB575R36S125	.125"	36	120	15	3,000	10.3
AOC24334ST	QQB575R34S125	.125"	34	72	16	2,862	9.2
AOC24232ST	QQB575R32S125	.125"	32	48	15	3,034	10.1
AOC241036ST	QQB575R36S156	.156"	36	240	12	6,000	20.9
AOC24736ST	QQB575R36S171	.171"	36	168	14	4,200	14.3
AOC24534ST	QQB575R34S171	.171"	34	120	13	4,770	15.6
AOC24332ST	QQB575R32S171	.171"	32	72	14	4,551	14.7
AOC241336ST	QQB575R36S203	.203"	36	312	11	7,800	28
AOC24834ST	QQB575R34S203	.203"	34	192	11	7,632	27.9
AOC24532ST	QQB575R32S203	.203"	32	120	11	7,585	24.6
AOC241636ST	QQB575R36S250	.250"	36	384	10	9,600	34.5
AOC24530ST	QQB575R30S281	.281"	30	120	9	12,000	42
AOC48836ST	QQB575R36S375	.375"	36	384	10	9,600	34.5

DESCRIPTION:

Federal Specification QQ-B-575. Minimum plating thickness - 40 microinches.

APPLICATION:

Silver plating rather than tin plating is necessary when the shielding is to be subjected to temperatures exceeding 200°C or if special corrosion resistance is required.

VALUE ADDED SERVICES
Cut Pieces, Ground Straps,
Terminating

Sycor Advance Wire and Cable