




**SYCOR**  
TECHNOLOGY INC.

Braid

## Tinned Copper Tubular Braid

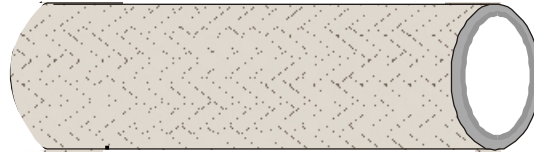

Sycor Part Number	QQ-B-575 Part Number	Nominal Inside Diamete	Wire Size AWG	Numbe Of Wires	Braid Size AWG	Circula MIL Area	Approx. Weight Lbs./Mft
A0C48534TT	QQB575R34T375	.375"	34	240	10	9,540	32.7
A0C48332TT	QQB575R32T375	.375"	32	144	11	9,102	32.4
A0C24730TT	QQB575R30T375	.375"	30	168	8	16,800	57
A0C241030TT	QQB575R30T437	.437"	30	240	6	24,000	80.6
A0C481136TT	QQB575R36T500	.500"	36	528	9	13,200	47.7
A0C48734TT	QQB575R34T500	.500"	34	336	9	13,356	47.7
0AC48432TT	QQB575R32T500	.500"	32	192	9	12,136	40
A0C241530TT	QQB575R30T500	.500"	30	360	5	36,000	117
A0C481030TT	QQB575R30T562	.562"	30	480	3	48,000	151
A0C481630TT	QQB575R30T656	.656"	30	768	1	76,800	255
A0C481836TT	QQB575R36T781	.781"	36	864	7	21,600	73.5
A0C184134TT	QQB575R34T781	.781"	34	528	7	20,956	72.5
A0C48732TT	QQB575R32T781	.781"	32	336	7	21,239	72.7
A0C48730TT	QQB575R30T875	.875"	30	336	5	33,600	118
A0C48830TT	QQB575R30T1000	1.000"	30	384	4	38,400	135
A0C48930TT	QQB575R30T1125	1.125"	30	432	4	43,200	150
A0C481030TT*		.1250"	30	480	3	48,000	165
A0C481130TT	QQB575R30T1375	1.375"	30	528	3	52,800	180
A0C481230TT	QQB575R30T1500	1.500"	30	576	3	57,600	195
A0C481430TT	QQB575R30T2000	2.000"	30	672	2	67,200	225
A0C481630TT*		2.250"	30	768	1	76,800	255

\* Manufactured to QQ-B-575 standards although these extra large sizes are not listed in the specifications.

Federal Specification QQ-B-575

TT= Tinned Tubular