




SYCOR
TECHNOLOGY INC.

Hook-Up Wire

CSA SR PVC, UL 1061
80°C, 300 Volts

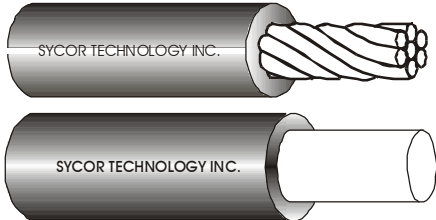

APPROVALS:

CSA and UL approved AWM.
CSA Type SR PVC
UL Style 1061

CONDUCTOR:

Solid or stranded tinned copper.

INSULATION:

Semi-rigid Polyvinyl Chloride.

TEMPERATURE RATING:

80°C

VOLTAGE RATING:

300 Volts.

APPLICATION:

For use in internal wiring of electrical and electronic equipment.

COLOUR:

Stock colours 0-9. Custom colours and striped combinations available upon request.

COLOUR CODES:

- | | |
|------------|------------|
| 0 - Black | 5 - Green |
| 1 - Brown | 6 - Blue |
| 2 - Red | 7 - Violet |
| 3 - Orange | 8 - Grey |
| 4 - Yellow | 9 - White |

Sycor Part Number	Size AWG	Strandin	Insulation Thickness In Inches	Nominal O.D. In Inches	UL Style Number	Approx. Weight Lbs/Mft.
AOL3207T	32	7/40	.009"	.028"	1061	0.6
AOL3001T	30	Solid	.009"	.030"	1061	0.7
AOL3007T	30	7/38	.009"	.032"	1061	0.8
AOL2801T	28	Solid	.009"	.033"	1061	0.9
AOL2807T	28	7/36	.009"	.037"	1061	1.1
AOL2601T	26	Solid	.009"	.038"	1061	1.4
AOL2607T	26	7/34	.009"	.041"	1061	1.5
AOL2401T	24	Solid	.009"	.042"	1061	1.9
AOL2407T	24	7/32	.009"	.045"	1061	2.1
AOL2201T	22	Solid	.009"	.047"	1061	2.8
AOL2207T	22	7/30	.009"	.051"	1061	3.0
AOL2219T	22	19/34	.009"	.052"	1061	3.2
AOL2001T	20	Solid	.009"	.053"	1061	3.9
AOL2007T	20	7/28	.009"	.058"	1061	4.4
AOL2019T	20	19/32	.009"	.062"	1061	4.9
AOL1807T	18	7/26	.009"	.068"	1061	6.6
AOL1819T	18	19/30	.009"	.072"	1061	7.2
AOL1619T	16	19/29	.009"	.079"	1061	8.9

**** OTHER GAUGES AND STRANDING AVAILABLE UPON REQUEST ****

VALUE ADDED SERVICES
Cutting & Stripping, Stripping, Terminating, Custom Printing and Colouring