




SYCOR
TECHNOLOGY INC.

Hook-Up Wire

CSA AWM, UL 1429/1534

80°C, 150 Volts

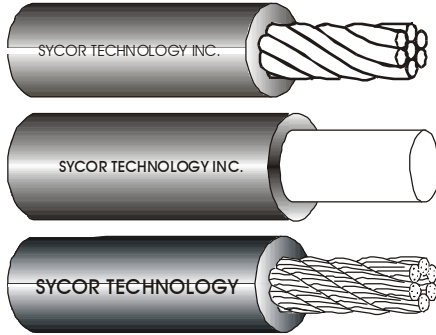

APPROVALS:
UL Style 1429 and 1534
CSA XLAWM

CONDUCTOR:
Solid, stranded or prefused tinned copper.

INSULATION:
Irradiated Polyvinyl Chloride*
*XLPVC

TEMPERATURE RATING:
80°C

VOLTAGE RATING:
150 Volts

APPLICATION:
Appliances, computer wiring, business machines, instrumentation and control systems.

COLOUR:
Stock colours 0-9. Custom colours and striped combinations available upon request.

COLOUR CODES:
0 - Black 5 - Green
1 - Brown 6 - Blue
2 - Red 7 - Violet
3 - Orange 8 - Grey
4 - Yellow 9 - White

VALUE ADDED SERVICES
Cutting & Stripping, Striping,
Terminating, Custom Printing,
Twisting

Sycor Part Number	Size AWG	Strandin	Insulation Thickness In Inches	Nominal O.D. In Inches	UL Style Number	Approx. Weight Lbs/MFt.
AOS3001T	30	Solid	.010"	.032"	1429	.753
AOS3007T	30	7/38	.010"	.033"	1429	.793
AOS2801T	28	Solid	.010"	.034"	1429	.951
AOS2807T	28	7/36	.010"	.036"	1429	1.086
AOS2819T	28	19/40	.010"	.036"	1429	1.130
AOS2601T	26	Solid	.010"	.038"	1429	1.326
AOS2607T	26	7/34	.010"	.040"	1429	1.437
AOS2619T	26	19/38	.010"	.040"	1429	1.582
AOS2401T	24	Solid	.010"	.042"	1429	1.903
AOS2407T	24	7/32	.010"	.045"	1429	2.079
AOS2419T	24	19/36	.010"	.045"	1429	2.140
AOS2201T	22	Solid	.010"	.047"	1429	2.660
AOS2207T	22	7/30	.010"	.051"	1429	2.930
AOS2219T	22	19/34	.010"	.052"	1429	3.174
AOS2001T	20	Solid	.010"	.054"	1429	3.980
AOS2007T	20	7/28	.010"	.059"	1429	4.457
AOS2010T	20	10/30	.010"	.058"	1429	4.210
AOS2019T	20	19/32	.010"	.060"	1429	4.810
AOS1801T	18	Solid	.010"	.061"	1429	5.937
AOS1807T	18	7/26	.010"	.070"	1429	6.760
AOS1816T	18	16/30	.010"	.069"	1429	6.223
AOS1819T	18	19/30	.010"	.070"	1429	7.061
AOS1601T	16	Solid	.010"	.073"	1429	9.103
AOS1619T	16	19/29	.010"	.078"	1429	9.504
AOS1626T	16	26/30	.010"	.082"	1429	9.636
AOS1401T	14	Solid	.010"	.086"	1534	12.430
AOS1419T	14	19/27	.010"	.096"	1534	13.818

**** OTHER COMBINATIONS AVAILABLE UPON REQUEST ****