




**SYCOR**  
TECHNOLOGY INC.

Hook-Up Wire

**CSA TR64, UL 1007/1569**

CSA 90°C, UL 80°C, 300 Volts

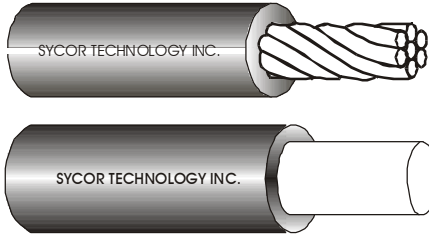

**APPROVALS:**

Tinned copper conductor with Polyvinyl Chloride insulation. CSA & UL approved. Passes CSA FT1, UL VW-1 flame tests.

**CONDUCTOR:**

Solid or stranded, tinned or prefused tinned copper.

**INSULATION:**

Polyvinyl Chloride

**TEMPERATURE RATING:**

CSA - 90° C  
UL 1007- 80°C  
UL 1569 - 105C

**VOLTAGERATING:**

300 Volts.

**APPLICATION:**

For use in internal wiring of electrical and electronic equipment.

**COLOUR:**

Stock colours 0-9. Custom colours and striped combinations available upon request.

**COLOUR CODES:**

0 - Black	5 - Green
1 - Brown	6 - Blue
2 - Red	7 - Violet
3 - Orange	8 - Grey
4 - Yellow	9 - White

Sycor Part Number	Size AWG	Stranding	Insulation Thickness In Inches	Nominal O.D. In Inches	UL Style Number	Approx. Weight Lbs/Mft.
A1A2601T	26	Solid	.016"	.047"	1007	1.6
A1A2607T	26	7/34	.016"	.050"	1007	1.8
A1A2401T	24	Solid	.016"	.052"	1007	2.2
A1A2407T	24	7/32	.016"	.056"	1007	2.5
A1A2201T	22	Solid	.016"	.058"	1007	3.2
A1A2207T	22	7/30	.016"	.062"	1007	3.4
A1A2001T	20	Solid	.016"	.064"	1007	4.5
A1A2010T	20	10/30	.016"	.070"	1007	4.8
A1A1801T	18	Solid	.016"	.074"	1007	6.7
A1A1816T	18	16/30	.016"	.079"	1007	7.0
A1A1601T	16	Solid	.016"	.082"	1007	9.9
A1A1626T	16	26/30	.016"	.092"	1007	10.3
A1A1401T	14	Solid	.016"	.096"	1007	14.9
A1A1441T	14	41/30	.016"	.106"	1007	15.6

\*The suffix "T" in the above partnumbers indicates a tinned copper conductor if a prefused conductor is required, replace with suffix "PF"

**VALUE ADDED SERVICES**

Cutting & Stripping, Striping,  
Terminating, Custom Printing,  
Twisting

**Sycor Technology Inc.** Advance Wire and Cable Division

2455 Milltower Court, Mississauga, Ontario L5N 5Z6 Phone: (905) 821-3591, Fax: (905) 821-7260

Sycor Advance Wire and Cable