




SYCOR
TECHNOLOGY INC.

Hook-Up Wire

CSA REW, UL 1430/3317

105°C, 300 Volts

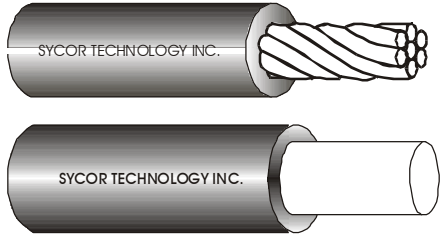

APPROVALS:

UL Style 1430 and 3317
CSA REW

CONDUCTOR:

Solid or stranded tinned copper.

INSULATION:

Irradiated Polyvinyl Chloride*
*XL PVC

TEMPERATURE RATING:

105°C

VOLTAGE RATING:

300 Volts

APPLICATION:

Motor leads or internal wiring of
appliances.

COLOUR:

Stock colours 0-9. Custom colours and
striped combinations available upon
request.

COLOUR CODES:

- | | |
|------------|------------|
| 0 - Black | 5 - Green |
| 1 - Brown | 6 - Blue |
| 2 - Red | 7 - Violet |
| 3 - Orange | 8 - Grey |
| 4 - Yellow | 9 - White |

VALUE ADDED SERVICES
Cutting & Stripping, Striping,
Terminating, Custom Printing,
Twisting

Sycor Part Number	Size AWG	Strandin	Insulation Thickness In Inches	Nominal O.D. In Inches	UL Style Number	Approx. Weight Lbs/Mft.
A1E2807T	28	7/36	.016"	.049"	1430	1.570
A1E2601T	26	Solid	.016"	.050"	1430	1.766
A1E2607T	26	7/34	.016"	.051"	1430	1.937
A1E2619T	26	19/38	.016"	.053"	1430	2.102
A1E2401T	24	Solid	.016"	.054"	1430	2.432
A1E2407T	24	7/32	.016"	.056"	1430	2.623
A1E2419T	24	19/36	.016"	.057"	1430	2.711
A1E2201T	22	Solid	.016"	.059"	1430	3.295
A1E2207T	22	7/30	.016"	.062"	1430	3.580
A1E2219T	22	19/34	.016"	.063"	1430	3.904
A1E2001T	20	Solid	.016"	.066"	1430	4.666
A1E2007T	20	7/28	.016"	.070"	1430	5.170
A1E2019T	20	19/32	.016"	.071"	1430	5.521
A1E2010T	20	10/30	.016"	.071"	1430	4.883
A1E1801T	18	Solid	.016"	.074"	1430	6.771
A1E1807T	18	7/26	.016"	.082"	1430	7.612
A1E1819T	18	19/30	.016"	.082"	1430	7.952
A1E1816T	18	16/30	.016"	.082"	1430	7.113
A1E1601T	16	Solid	.016"	.085"	1430	10.02
A1E1619T	16	19/29	.016"	.092"	1430	10.27
A1E1626T	16	26/30	.016"	.092"	1430	10.56
A1E1401T	14	Solid	.016"	.098"	3317	15
A1E1419T	14	19/.0147	.016"	.107"	3317	15.6
A1E1441T	14	41/30	.016"	.109"	3317	15.7
A1E1201T	12	Solid	.016"	.115"	3317	22.9
A1E1219T	12	19/.0185	.016"	.124"	3317	23.8
A1E1265T	12	65/30	.016"	.127"	3317	23.3
A1E1037T	10	37/.0167	.016"	.149"	3317	36.7