




**SYCOR**  
TECHNOLOGY INC.

**Hook-Up Wire**

**CSA CL1252, UL 3266**  
125°C, 300 Volts

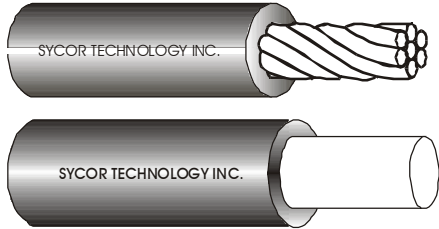

**APPROVALS:**  
CSA AWM, CL1252  
UL Style 3266

**CONDUCTOR:**  
Solid or stranded tinned copper.

**INSULATION:**  
Irradiated Cross-linked Polyethylene

**TEMPERATURE RATING:**  
-55°C to +125°C

**VOLTAGE RATING:**  
300 Volts.

**APPLICATION:**  
Ideal for transformer applications.

**COLOUR:**  
Stock colours 0-9. Custom colours and striped combinations available upon request.

**COLOUR CODES:**

0 - Black	5 - Green
1 - Brown	6 - Blue
2 - Red	7 - Violet
3 - Orange	8 - Grey
4 - Yellow	9 - White

**VALUE ADDED SERVICES**

Cutting & Stripping, Striping,  
Terminating, Custom Printing,  
Twisting

Sycor Part Number	Size AWG	Strandin	Insulation Thickness In Inches	Nominal O.D. In Inches
A1P2601T	26	Solid	.015"	.048"
A1P2607T	26	7/34	.015"	.051"
A1P2619T	26	19/38	.015"	.052"
A1P2401T	24	Solid	.015"	.052"
A1P2407T	24	7/32	.015"	.056"
A1P2419T	24	19/36	.015"	.057"
A1P2201T	22	Solid	.015"	.057"
A1P2207T	22	7/30	.015"	.062"
A1P2219T	22	19/34	.015"	.064"
A1P2001T	20	Solid	.015"	.064"
A1P2007T	20	7/28	.015"	.070"
A1P2019T	20	19/32	.015"	.072"
A1P1801T	18	Solid	.015"	.072"
A1P1807T	18	7/26	.015"	.080"
A1P1816T	18	16/30	.015"	.080"
A1P1819T	18	19/30	.015"	.082"
A1P1601T	16	Solid	.015"	.083"
A1P1619T	16	19/.0117	.015"	.089"
A1P1626T	16	26/30	.015"	.092"
A1P1401T	14	Solid	.015"	.098"
A1P1419T	14	19/.0147	.015"	.106"
A1P1441T	14	41/30	.015"	.107"
A1P1219T	12	19/.0185	.015"	.127"
A1P1265T	12	65/30	.015"	.127"
A1P1037T	10	37/.0167	.015"	.151"

**\*\* OTHER GAUGES AVAILABLE UPON REQUEST \*\***