




SYCOR

TECHNOLOGY INC.

Hook-Up Wire

CSA TEW, UL 1015, 1028, 1283, 1284

Tinned Copper Conductor 105°C, 600 Volts

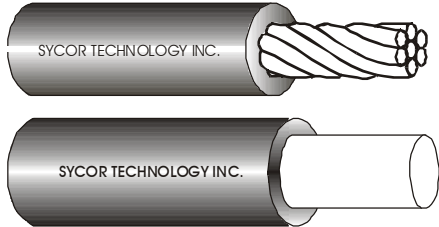

APPROVALS:

CSA approved Spec. C22.2 No. 127
CSA Type TEW
UL approved appliance wiring material style
1015, 1028, 1283 & 1284.

CONDUCTORS:

Solid, stranded or prefused tinned copper.

INSULATION:

Polyvinyl Chloride.

TEMPERATURE RATING:

105°C

VOLTAGE RATING:

600 Volts

APPLICATION:

For use in internal wiring of electrical equipment
such as electric ranges, heating equipment and
lighting fixtures.

COLOUR:

Stock colours 0-9. Custom colours and striped
combinations available upon request.

COLOUR CODES:

0 - Black	5 - Green
1 - Brown	6 - Blue
2 - Red	7 - Violet
3 - Orange	8 - Grey
4 - Yellow	9 - White

VALUE ADDED SERVICES

Cutting & Stripping, Striping,
Terminating, Custom Printing
and Colouring, Twisting

Sycor Part Number	Size AWG	Strandin	Insulation Thickness In Inches	Nominal O.D. In Inches	UL Style Numbe	Approx. Weight Lbs/Mft.
A1U2601T	26	Solid	.031"	.080"	1015	2
A1U2607T	26	7/34	.031"	.081"	1015	2
A1U2401T	24	Solid	.031"	.085"	1015	5
A1U2407T	24	7/32	.031"	.086"	1015	5
A1U2201T	22	Solid	.031"	.093"	1015	7
A1U2207T	22	7/30	.031"	.095"	1015	7
A1U2001T	20	Solid	.031"	.098"	1015	8
A1U2010T	20	10/30	.031"	.102"	1015	8
A1U1801T	18	Solid	.031"	.104"	1015	11
A1U1816T	18	16/30	.031"	.112"	1015	11
A1U1601T	16	Solid	.031"	.115"	1015	15
A1U1626T	16	26/30	.031"	.125"	1015	15
A1U1401T	14	Solid	.031"	.130"	1015	22
A1U1441T	14	41/30	.031"	.142"	1015	22
A1U1201T	12	Solid	.031"	.145"	1015	31
A1U1265T	12	65/30	.031"	.155"	1015	31
A1U1001T	10	Solid	.031"	.166"	1015	44
A1U10104T	10	104/30	.031"	.183"	1015	44
A1U08133T	8	133/29	.045"	.250"	1028	70
A1U06133T	6	133/27	.060"	.335"	1283	104
A1U04133T	4	133/25	.060"	.390"	1283	170
A1U02133T	2	133/23	.060"	.460"	1283	256
A1U02665T	2	665/30	.060"	.470"	1283	256
A1U01259T	1	259/25	.075"	.525"	1284	323
A1U01836T	1	836/30	.075"	.535"	1284	323
A1U1/01045T	1/0	1045/30	.075"	.580"	1284	400
A1U2/01330T	2/0	1330/30	.075"	.640"	1284	490
A1U3/01661T	3/0	1661/30	.075"	.680"	1284	600
A1U4/02107T	4/0	2107/30	.075"	.785"	1284	750

*The suffix "T" in the above partnumbers indicates Tinned Copper conductors
if a prefused conductor is required replace with suffix "PF"

Sycor Technology Inc. Advance Wire and Cable Division

2455 Milltower Court, Mississauga, Ontario L5N 5Z6 Phone: (905) 821-3591, Fax: (905) 821-7260