




SYCOR
TECHNOLOGY INC.

Hook-Up Wire

CSA REW, UL 1431

105°, 600 Volts

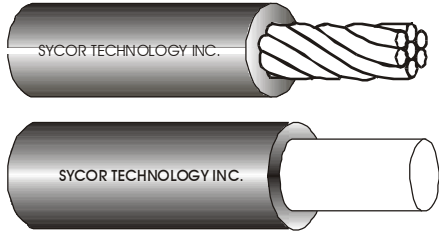

APPROVALS:

UL 1431
CSA REW
UL VW-1 Flame Test

CONDUCTOR:

Solid or stranded tinned copper.

INSULATION:

Irradiated Polyvinyl Chloride*
*XLPVC

TEMPERATURE RATING:

-55°C to +105°C

VOLTAGE RATING:

600 Volts

APPLICATION:

Motor leads or internal wiring of appliances.

COLOUR:

Stock colours 0-9. Custom colours and striped combinations available upon request.

COLOUR CODES:

0 - Black	5 - Green
1 - Brown	6 - Blue
2 - Red	7 - Violet
3 - Orange	8 - Grey
4 - Yellow	9 - White

VALUE ADDED SERVICES

Cutting & Stripping, Stripping,
Terminating, Custom Printing,
Twisting

Sycor Part Number	Size AWG	Strandin	Insulation Thickness In Inches	Nominal O.D. In Inches	Approx. Weight Lbs/MFt.
A2A2407T	24	7/32	.032"	.088"	4.732
A2A2419T	24	19/36	.032"	.088"	4.923
A2A2201T	22	Solid	.032"	.089"	5.345
A2A2207T	22	7/30	.032"	.092"	5.972
A2A2219T	22	19/34	.032"	.095"	6.181
A2A2001T	20	Solid	.032"	.096"	6.976
A2A2007T	20	7/28	.032"	.102"	7.734
A2A2019T	20	19/32	.032"	.103"	8.012
A2A2010T	20	10/30	.032"	.105"	7.443
A2A1801T	18	Solid	.032"	.104"	9.497
A2A1807T	18	7/26	.032"	.112"	10.38
A2A1819T	18	19/30	.032"	.112"	10.73
A2A1816T	18	16/30	.032"	.111"	10.15
A2A1601T	16	Solid	.032"	.115"	12.93
A2A1619T	16	19/.0117	.032"	.122"	3.01
A2A1626T	16	26/30	.032"	.122"	13.55
A2A1401T	14	Solid	.032"	.128"	18.13
A2A1419T	14	19/.0147	.032"	.136"	19.12
A2A1441T	14	41/30	.032"	.142"	19.55
A2A1201T	12	Solid	.032"	.145"	26.96
A2A1219T	12	19/.0185	.032"	.154"	27.80
A2A1265T	12	65/30	.032"	.156"	28.20
A2A1037T	10	37/.0167	.032"	.178"	41.60
A2A10105T	10	105/30	.032"	.188"	43.43
A2A08133T	8	133/.011	.051"	.261"	70.48
A2A08168T	8	168/30	.051"	.267"	74.70
A2A06133T	6	133/.0141	.065"	.342"	119.28
A2A04133T	4	133/.0177	.065"	.392"	173.82

Sycor Technology Inc. Advance Wire and Cable Division

2455 Milltower Court, Mississauga, Ontario L5N 5Z6 Phone: (905) 821-3591, Fax: (905) 821-7260