



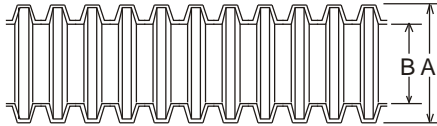

SYCOR
TECHNOLOGY INC.

Tubing & Heatshrink

Corrugated Split/Solid Loom



SPLIT FULL LENGTH

DESCRIPTION:

This material is resistant to abrasion, gasoline, oil and many chemicals. This economical and light weight product is ideal for most automotive applications and is recognized by the major automotive manufacturers.

Sycor Part Number	Size	(B) Inside Diameter	(A) Outside Diameter	Approx. Weight Lbs/Mft.
	1/4"	.265"	.395"	8
	5/16"	.350"	.504"	13.5
	3/8"	.400"	.560"	14.5
	7/16"	.468"	.628"	16
	1/2"	.510"	.690"	21
	5/8"	.650"	.830"	27
	3/4"	.760"	.950"	32
	1"	1.010"	1.290"	40
	1 1/4"	1.286"	1.510"	70
	1 1/2"	1.490"	1.860"	85.0

VALUE ADDED SERVICES
Cut to length pieces

Types Available	Operating Temperature	Vehicle Location
Polyethylene	-40°C to +80°C	Passenger Compartment
Flame Retardant Polyethylene	-40°C to +80°C	Passenger Compartment
Flame Retardant Polypropylene	-25°C to +125°C	Engine Compartment
Nylon	-25°C to +120°C	Engine Compartment
Nylon Co-Polymer	-25°C to +120°C	Engine Compartment

Sycor Advance Wire and Cable