




SYCOR
TECHNOLOGY INC.

Computer Cable

Multi-Conductor Foil/Braid Shield-CSA FT-4

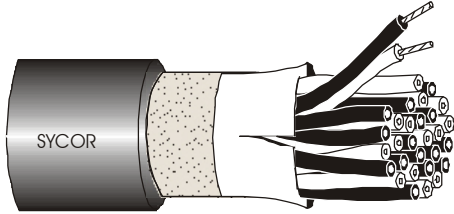

CONSTRUCTION:

Stranded tinned copper conductors with colour coded Semi-Rigid Polyvinyl Chloride insulation, Polyvinyl Chloride jacket, 85% braided tinned copper shield, and a 100% foil shield.

TEMPERATURE RATING:

-20°C to 105°C

VOLTAGE RATING:

600 Volts

JACKET COLOUR:

Grey

COLOUR CODE CHART:

2

APPROVAL:

CSA FT-4
UL Approved

Sycor Part Number	No. of Cond	AWG	Strand	Nom. Ins. Thick.	Nom. Jkt. Thick.	Nom O.D.	Weight #/Mft.
R2A0324	3	24	7/32	.010"	.025"	.172"	28
R2A0424	4	24	7/32	.010"	.025"	.183"	32
R2A0624	6	24	7/32	.010"	.025"	.201"	38
R2A0924	9	24	7/32	.010"	.025"	.230"	48
R2A1224	12	24	7/32	.010"	.025"	.253"	58
R2A1524	15	24	7/32	.010"	.025"	.274"	62
R2A2024	20	24	7/32	.010"	.030"	.314"	86
R2A2524	25	24	7/32	.010"	.030"	.341"	98
R2A0322	3	22	7/30	.010"	.025"	.185"	32
R2A0422	4	22	7/30	.010"	.025"	.198"	38
R2A0622	6	22	7/30	.010"	.025"	.219"	46
R2A0922	9	22	7/30	.010"	.025"	.251"	62
R2A1222	12	22	7/30	.010"	.025"	.277"	74
R2A1522	15	22	7/30	.010"	.025"	.301"	86
R2A2022	20	22	7/30	.010"	.030"	.345"	108
R2A2522	25	22	7/30	.010"	.030"	.376"	128

VALUE ADDED SERVICES

Cutting & Stripping, Cable & Harness Assembly, Custom Colouring, Stripping, Bonding, Round to Flat Lamination, Tin Dipping, Re-spooling

Short Run Custom Designed Cables For Prototypes and Engineering Runs

Sycor Advance Wire and Cable