




SYCOR

TECHNOLOGY INC.

Multi-Paired Shielded Computer Cable

105°C, 300 Volts

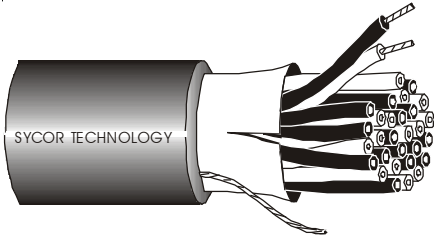

CONSTRUCTION:

Stranded tinned copper conductors with colour coded Polyvinyl Chloride insulation, Polyvinyl Chloride jacket, 100% foil shield, and a stranded tinned copper drain wire.

TEMPERATURE RATING:

-20°C to 105°C

VOLTAGE RATING:

300 Volts

JACKET COLOUR:

Grey

COLOUR CODE CHART:

3

APPROVAL:

CSA FT-4

Sycor Part Number	# of Pairs	Size AWG	Strand	Insulation Thickness In Inches	Nom. Jacket Thickness In Inches	Nom O.D.	Nom. Cap. pF/Ft.	
							A	B
J2A0220	2	20	10x30	.012"	.030"	.295"	35	62
J2A0320	3	20	10x30	.012"	.030"	.312"	35	62
J2A0420	4	20	10x30	.012"	.030"	.340"	35	62
J2A0620	6	20	10x30	.012"	.030"	.391"	35	62
J2A0920	9	20	10x30	.012"	.030"	.457"	35	62
J2A1220	12	20	10x30	.012"	.035"	.510"	35	62
J2A1520	15	20	10x30	.012"	.035"	.575"	35	62
J2A0218	2	18	16x30	.016"	.035"	.376"	30	50
J2A0318	3	18	16x30	.018"	.035"	.416"	30	50
J2A0418	4	18	16x30	.018"	.035"	.451"	30	50
J2A0618	6	18	16x30	.018"	.035"	.481"	30	50
J2A0918	9	18	16x30	.018"	.040"	.596"	30	50
J2A1218	12	18	16x30	.018"	.050"	.716"	30	50
J2A1518	15	18	16x30	.015"	.060"	.722"	30	50
J2A1918	19	18	16x30	.015"	.060"	.763"	30	50
J2A2518	25	18	16x30	.015"	.060"	.874"	30	50
J2A0216	2	16	26x30	.015"	.030"	.393"	30	50
J2A0316	3	16	26x30	.015"	.030"	.419"	30	50
J2A0416	4	16	26x30	.015"	.030"	.459"	30	50
J2A0616	6	16	26x30	.015"	.030"	.533"	30	50
J2A0916	9	16	26x30	.015"	.030"	.627"	30	50
J2A1216	12	16	26x30	.015"	.050"	.731"	30	50

A - Conductor to conductor.

B - 1 conductor and other conductors connected to shield.

Short Run Custom Designed Cables For Prototypes and Engineering Runs

VALUE ADDED SERVICES

Cutting & Stripping, Cable & Harness Assembly, Custom Colouring, Striping, Bonding, Round to Flat Lamination, Tin Dipping, Re-spooling

Sycor Technology Inc. Advance Wire and Cable Division

2455 Milltower Court, Mississauga, Ontario L5N 5Z6 Phone: (905) 821-3591, Fax: (905) 821-7260

Sycor Advance Wire and Cable