




SYCOR

TECHNOLOGY INC.

Ribbon Cable

.050" Centre Extruded Ribbon Cable

UL Approved, 105°C, 300 Volts

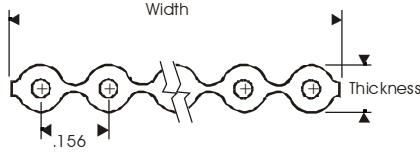

APPROVALS:
UL Style 2651

CONDUCTOR:
9 through 72, tin coated copper.
Solid or stranded copper.

VOLTAGE RATING:
300 Volts

TEMPERATURE RATING:
105°C

COLOUR:
Grey
Outside conductor printed for polarity

VALUE ADDED SERVICES

Cutting & Stripping
Terminating, Tin Dipping

Sycor Part Number	Number Of Cond.	Size AWG	Strandin	A	B	C	Approx Weight Lbs/Mft
P1A2809T-8	9	28	7/36	.450"	.400"	.035"	41
P1A2810T-8	10	28	7/36	.500"	.450"	.035"	46
P1A2814T-8	14	28	7/36	.700"	.650"	.035"	58
P1A2815T-8	15	28	7/36	.750"	.700"	.035"	61
P1A2816T-8	16	28	7/36	.800"	.750"	.035"	64
P1A2820T-8	20	28	7/36	1.00"	.950"	.035"	76
P1A2824T-8	24	28	7/36	1.20"	1.15"	.035"	88
P1A2825T-8	25	28	7/36	1.25"	1.20"	.035"	91
P1A2826T-8	26	28	7/36	1.30"	1.25"	.035"	94
P1A2834T-8	34	28	7/36	1.70"	1.65"	.035"	118
P1A2837T-8	37	28	7/36	1.85"	1.80"	.035"	130
P1A2840T-8	40	28	7/36	2.00"	1.95"	.035"	143
P1A2850T-8	50	28	7/36	2.50"	2.45"	.035"	173
P1A2860T-8	60	28	7/36	3.00"	2.95"	.035"	203
P1A2864T-8	64	28	7/36	3.20"	3.15"	.035"	216
P1A2872T-8	72	28	7/36	3.60"	3.55"	.035"	230

Sycor Part Number	Number Of Cond.	Size AWG	Strandin	A	B	C	Approx Weight Lbs/Mft
P1A3010T-8	10	30	Solid	.500"	.450"	.031"	41
P1A3014T-8	14	30	Solid	.700"	.650"	.031"	53
P1A3016T-8	16	30	Solid	.800"	.750"	.031"	59
P1A3020T-8	20	30	Solid	1.00"	.950"	.031"	71
P1A3024T-8	24	30	Solid	1.20"	1.15"	.031"	83
P1A3026T-8	26	30	Solid	1.30"	1.25"	.031"	89
P1A3034T-8	34	30	Solid	1.70"	1.65"	.031"	113
P1A3040T-8	40	30	Solid	2.00"	1.95"	.031"	138
P1A3050T-8	50	30	Solid	2.50"	2.45"	.031"	168
P1A3060T-8	60	30	Solid	3.00"	2.95"	.031"	198

Sycor Advance Wire and Cable