




SYCOR
TECHNOLOGY INC.

Ribbon Cable

.100" Centre Extruded Ribbon Cable

UL Approved, 105°C, 300 Volts

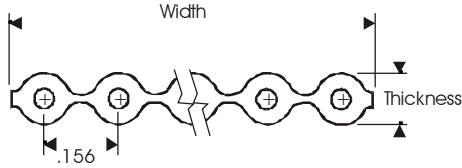

APPROVALS:

UL Style 2651

CONDUCTOR:

3 through 10, topcoated.

VOLTAGE RATING:

300 Volts

TEMPERATURE RATING:

105°C

COLOUR:

Grey

Outside conductor printed for polarity

VALUE ADDED SERVICES

Cutting & Stripping
Terminating, Tin Dipping

| Sycor Part Number | Numbe Of Cond. | Size Awg | Strandin | A | B | C | Approx Weight Lbs/Mft |
|-------------------|----------------|----------|----------|--------|--------|-------|-----------------------|
| P1C2603PF-8 | 3 | 26 | 7/34 | .354" | .300" | .046" | 6 |
| P1C2604PF-8 | 4 | 26 | 7/34 | .454" | .400" | .046" | 8 |
| P1C2605PF-8 | 5 | 26 | 7/34 | .554" | .500" | .046" | 10 |
| P1C2606PF-8 | 6 | 26 | 7/34 | .654" | .600" | .046" | 12 |
| P1C2607PF-8 | 7 | 26 | 7/34 | .754" | .700" | .046" | 14 |
| P1C2608PF-8 | 8 | 26 | 7/34 | .854" | .800" | .046" | 17 |
| P1C2609PF-8 | 9 | 26 | 7/34 | .954" | .900" | .046" | 19 |
| P1C2610PF-8 | 10 | 26 | 7/34 | 1.054" | 1.000" | .046" | 21 |

| Sycor Part Number | Numbe Of Cond. | Size Awg | Strandin | A | B | C | Approx Weight Lbs/Mft |
|-------------------|----------------|----------|----------|--------|--------|-------|-----------------------|
| P1C2403PF-8 | 3 | 24 | 7/32 | .354" | .300" | .046" | 8 |
| P1C2404PF-8 | 4 | 24 | 7/32 | .454" | .400" | .046" | 10 |
| P1C2405PF-8 | 5 | 24 | 7/32 | .554" | .500" | .046" | 13 |
| P1C2406PF-8 | 6 | 24 | 7/32 | .654" | .600" | .046" | 16 |
| P1C2407PF-8 | 7 | 24 | 7/32 | .754" | .700" | .046" | 18 |
| P1C2408PF-8 | 8 | 24 | 7/32 | .854" | .800" | .046" | 21 |
| P1C2409PF-8 | 9 | 24 | 7/32 | .954" | .900" | .046" | 24 |
| P1C2410PF-8 | 10 | 24 | 7/32 | 1.054" | 1.000" | .046" | 26 |

In this catalogue we have included a wide variety of wire & cable products. However, there are many more available. If the product you require is not shown here, contact your Sycor Representative.