




SYCOR
TECHNOLOGY INC.

Ribbon Cable

.100" Centre Extruded Ribbon Cable

UL Approved, 105°C, 300 Volts

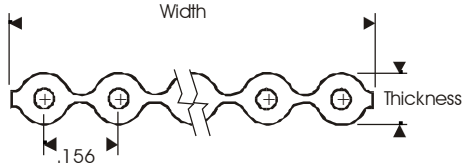

APPROVALS:

UL Style 2651

CONDUCTOR:

3 through 10, topcoated.

VOLTAGE RATING:

300 Volts

TEMPERATURE RATING:

105°C

COLOUR:

Grey

Outside conductor printed for polarity

VALUE ADDED SERVICES

Cutting & Stripping
Terminating, Tin Dipping

Sycor Part Number	Numbe Of Cond.	Size Awg	Strandin	A	B	C	Approx Weight Lbs/Mft
P1C2603PF-8	3	26	7/34	.354"	.300"	.046"	6
P1C2604PF-8	4	26	7/34	.454"	.400"	.046"	8
P1C2605PF-8	5	26	7/34	.554"	.500"	.046"	10
P1C2606PF-8	6	26	7/34	.654"	.600"	.046"	12
P1C2607PF-8	7	26	7/34	.754"	.700"	.046"	14
P1C2608PF-8	8	26	7/34	.854"	.800"	.046"	17
P1C2609PF-8	9	26	7/34	.954"	.900"	.046"	19
P1C2610PF-8	10	26	7/34	1.054"	1.000"	.046"	21

Sycor Part Number	Numbe Of Cond.	Size Awg	Strandin	A	B	C	Approx Weight Lbs/Mft
P1C2403PF-8	3	24	7/32	.354"	.300"	.046"	8
P1C2404PF-8	4	24	7/32	.454"	.400"	.046"	10
P1C2405PF-8	5	24	7/32	.554"	.500"	.046"	13
P1C2406PF-8	6	24	7/32	.654"	.600"	.046"	16
P1C2407PF-8	7	24	7/32	.754"	.700"	.046"	18
P1C2408PF-8	8	24	7/32	.854"	.800"	.046"	21
P1C2409PF-8	9	24	7/32	.954"	.900"	.046"	24
P1C2410PF-8	10	24	7/32	1.054"	1.000"	.046"	26

In this catalogue we have included a wide variety of wire & cable products. However, there are many more available. If the product you require is not shown here, contact your Sycor Representative.