




SYCOR
TECHNOLOGY INC.

Ribbon Cable

Shielded & Jacketed Ribbon Cable

105°C, UL2912 - 150 Volts, UL20081 - 300 Volts

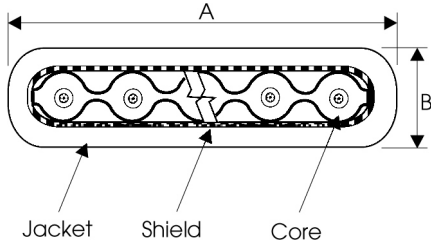

APPROVALS:

UL Style 2912
UL Style 20081

CONDUCTOR:

Tinned Copper

VOLTAGERATING:

UL Style 2912 - 150 Volts
UL Style 20081 - 300 Volts

TEMPERATURE RATING:

105°C

SHIELD:

.005" Expanded copper mesh 360° wrap.
.002" Aluminum/.001" mylar 360° wrap.
Aluminum side towards core.

JACKET:

Polyvinyl Chloride

COLOUR:

Grey or Black

Sycor Part Number	Number of Conductor	Jacket Wall Thickness	A (Inches)	B (Inches)
P2JXX10T	10	.035"	.580	.115
P2JXX14T	14	.035"	.780	.115
P2JXX15T	15	.035"	.830	.115
P2JXX16T	16	.035"	.880	.115
P2JXX20T	20	.035"	1.080	.115
P2JXX24T	24	.035"	1.280	.115
P2JXX25T	25	.035"	1.330	.115
P2JXX26T	26	.035"	1.380	.115
P2JXX34T	34	.035"	1.780	.115
P2JXX37T	37	.035"	1.930	.115
P2JXX40T	40	.035"	2.080	.115
P2JXX50T	50	.035"	2.580	.115
P2JXX60T	60	.035"	3.080	.115

XX Refers to AWG size.
AWG size to be specified when ordering.

VALUE ADDED SERVICES

Cutting & Stripping
Terminating, Custom Printing,
Tin Dipping

Sycor Advance Wire and Cable