



# Type CL-902 Neoprene® Lead Wire

## Description

Stranded tinned copper conductor with Neoprene® insulation

## Approvals:

UL 3044, CSA CL 902

## Construction

Stranded tinned copper conductor.  
Neoprene® rubber insulation.

## Temperature Rating

CSA/UL -35°C to +90°C

## Voltage Rating

CSA/UL 300V


## Application

Designed for motor leads for insulation systems. Internal wiring of appliances and electrical or electronic equipment.



Sycor Part No	AWG	#Conductor	Cond. Diam. (in)	Nom. Insul. Thickness (in)	O.D. (in)	Approx Weight Lbs./Mft
CL9022010	20	1	10x30	0.03	0.102	9
CL9021816	18	1	16x30	0.03	0.112	11
CL9021626	16	1	26x30	0.03	0.125	15

## Color codes

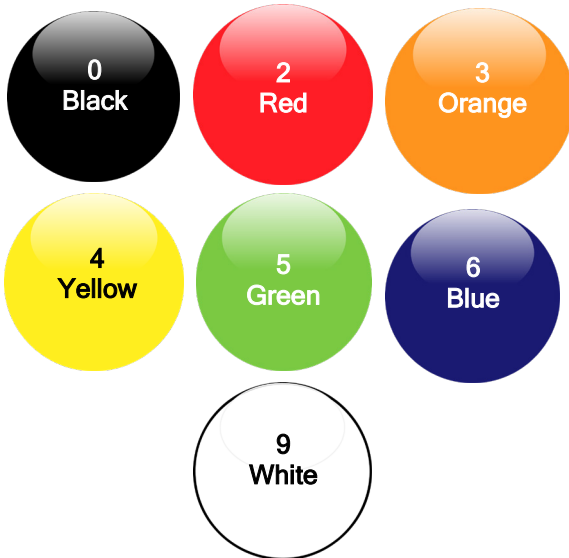

## Value Added Services



Cutting



Re-Spooling

Sycor Technology Inc., 1-2220 Argentia Road, Mississauga ON L5N 2K7

[www.sycor.com](http://www.sycor.com) 1-800-268-9444 [sales@sycor.com](mailto:sales@sycor.com)

Sycor International Inc ©All Rights Reserved