




**SYCOR**  
TECHNOLOGY INC.

## Control Cable

### Multi-Conductor Braid Shield-CSA FT-4

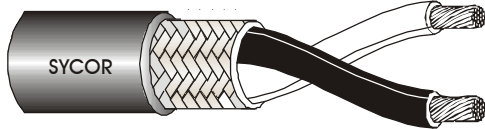

**CONSTRUCTION:**

Stranded tinned copper conductors with colour coded Polyethylene insulation, clear mylar wrap, an 80% braided tinned copper shield and overall Polyvinyl Chloride jacket.

**TEMPERATURE RATING:**

-20°C to 80°C

**VOLTAGE RATING:**

600 Volts

**JACKET COLOUR:**

Grey

**COLOUR CODE:**

See Chart

**APPROVALS:**

CSA FT-4  
UL Approved

Sycor Part Number	No. of Cond	AWG	Strand	Nom. Insul. Thick.	Nom. Jkt. Thick.	Nom. O.D.	Nom. Cap.		Weigh #/Mft.
							A	B	
S2A0220	2	20	26/34	.015"	.030"	.224"	26	47	36
S2A0320	3	20	26/34	.015"	.030"	.235"	25	45	42
S2A0420	4	20	26/34	.015"	.030"	.253"	24	43	48
S2A0520	5	20	26/34	.015"	.030"	.263"	21	38	54
S2A0620	6	20	26/34	.015"	.030"	.281"	16	28	58
S2A0820	8	20	26/34	.015"	.030"	.310"	16	28	74
S2A1020	10	20	26/34	.015"	.030"	.337"	16	28	92

A - Conductor to conductor

B - 1 Conductor and other conductors connected to shield

Colour Code of Conductor	Conductors Colours
1	Black
2	White
3	Red
4	Green
5	Yellow
6	Blue
7	Brown
8	Orange
9	Grey
10	Purple

**VALUE ADDED SERVICES**

Cutting & Stripping, Cable & Harness Assembly, Custom Colouring, Striping, Bonding, Round to Flat Lamination, Tin Dipping, Re-spooling

Sycor Advance Wire and Cable